



2MP

2.8-12mm Motorised Lens 30M IR

4 in 1

CVP9325IREL-AHD2M-Z

Concept Pro Lite 2MP 4-in-1 Analogue Motorised External Dome Camera

The CVP9325IREL-AHD2M-Z model is a 4-in-1 analogue camera that has been designed to deliver the highest image quality for demanding external environments. This external dome features a 2.8-12mm motorised lens, smart infrared LEDs with 30m illumination range, and provides crisp 2-megapixel video at real-time frame rates with true wide dynamic range and enhanced low light performance. This camera is also designed for excellent compatibility with the Concept Pro range of hybrid digital video recorders.



Internal Cable Connections

The installers needs have been carefully considered in the design of this product, utilising internal cable connections to aid in the ease of installation, reducing the need for complicated work in impractical installation areas.



Enhanced Low Light

This CCTV camera utilises an Enhanced Low Light CMOS sensor with greater light sensitivity, resulting in the camera capturing colour images long after standard CCTV cameras have switched to black and white night mode.



True Wide Dynamic Range

With true wide dynamic range, this camera can capture sharp images throughout the entire field of view, even when there are severe differences between light levels.

KEY FEATURES

- Max. 25FPS @ 2MP
- 2.8-12mm Motorised Lens
- Up to 30m Smart IR Illumination
- ◆ 4-in-1 Operation (AHD/TVI/CVI/CVBS)
- Enhanced Low Light Performance
- True Wide Dynamic Range
- ◆ DC12V/AC24V Dual Power Input

OTHER FEATURES

- DC12V Power Output
- BNC & UTP Video Output
- Up the Coax Coaxitron Support
- AGC, Sens-up, AWB, BLC, HLC, Defog

ANALOGUE HD TYPICAL CABLE DISTANCE

Camera

DVR

	5MP	2MP	720P
COAX (RG59)	UP TO 500M	UP TO 500M	UP TO 500M
CAT5e	UP TO 200M	UP TO 305M	UP TO 350M
CAT6	UP TO 200M	UP TO 305M	UP TO 350M

*Approximate distances calculated using HD MasterBaluns.

Actual transmission range will vary depending on type and quality of cable and baluns.



CVP9325IREL-AHD2M-Z

Concept Pro Lite 2MP 4-in-1 Analogue Motorised External Dome Camera




SPECIFICATION

Model/Fea	ature	CVP9325IREL-AHD2M-Z	
	Image Sensor	1/2.8" Progressive Scan CMOS	
	Video Output Type	AHD/TVI/CVI/CVBS	
	Signal System	PAL/NTSC	
	Min. Illumination	Colour: 0.002 lux (Enhanced Low Light)	
		B&W: 0.0002 lux (Enhanced Low Light)	
		0 lux with IR on	
Camera	Electronic Shutter	Auto/Manual, 1/25-1/25,600s	
	S/N Ratio	≥50dB	
	IR LEDs	×4	
	IR Illumination Range	Max. 30m	
	IR Control	On/Off	
	Adaptable IR	Auto	
	Pivot Axis	Pan: 0°-353°, Tilt: 0°-70°, Rotation: 0°-227°	
1	Lens Type	Motorised	
	Mount Type	Built-in	
	Focal Length	f=2.8-12mm	
	Aperture	F1.4	
Lens	Angle of View	H: 98-39°, V: 53-22°, D: 103-42°	
	Focus	Auto/Manual	
	Iris	Fixed	
		**	
	Resolution Frame Rate	2MP (1920 x 1080), SD (960 x 576) AHD/TVI/CVI: 25/30FPS @ 2MP	
	Frame Rate	CVBS: 25/30FPS @ SD	
	Day (Nijerle)		
	Day/Night	True Day & Night with ICR (Auto/Colour/B&W/EXT)	
	Backlight Compensation	BLC/HLC	
	Wide Dynamic Range	True WDR	
	White Balance	Auto/AutoExt/Preset/Manual	
Video	Gain Control	Auto (AGC, 0–20)	
	Noise Reduction	2D/3D-DNR (High/Middle/Low/Off)	
	Motion Detection	Yes	
	Defog	Yes	
	Image Setting	Freeze, Flip	
	Image Adjustment	Brightness, Sharpness, Colour Gain, Ace, Gamma	
	Privacy Masking	Yes	
	Sens-Up	Yes (x2/x4/x8/x16/x32/Off)	
	Transmission Distance	Max. 500m (1Vp-p 75Ω)	
Interface	Video Output	x1 1.0Vp-p 75Ω BNC/x1 2-pin UTP	
	Audio Interface	-	
	RS-485	-	
	Control Protocol	N/A	
	Up the Coax (Coaxitron) Support	Yes	
	OSD Buttons	Yes	
	Power Supply	DC12V±10%/AC24V±10%	
	Power Output	x1 DC12V 100mA	
	Power Consumption	Max. 6.5W	
	Operating Temperature	-30°C to +40°C	
	Operating Humidity	20–80% RH	
General	Ingress Protection	IP66	
	Impact Resistance	IK10	
	Housing Materials	Aluminum Diecasting	
	RAL	RAL 9010 Pure White	
	Dimension	Ø151.4×109.3mm	
	Net Weight	≈960g	
	Gross Weight	≈1,300g ≈1,300g	
Certification	Certifications	~1,500g CE	
Oel uncauon	O G I III O G I I I I I	OL	

DIMENSIONS

All measurements are in mm.

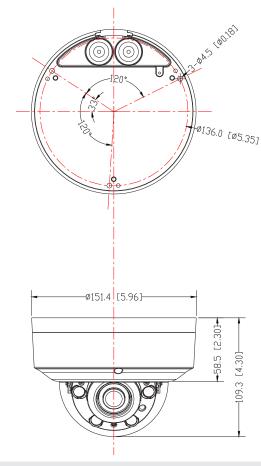

ORDER CODE

CVP9325IREL-AHD2M-Z

Concept Pro Lite 2MP 4-in-1 Analogue Motorised External Dome Camera

OTHER PRODUCTS IN THE RANGE

CVP9325IREL-AHD5M-Z

• Concept Pro 5MP 4-in-1 Analogue Motorised External Dome Camera

RECOMMENDED ACCESSORIES

 CP-BASE-2-V2 • CP-PM-2-V2

+ CP-WM-2-V2

+ CP-CM-V2

• CP-TM-2-V2 + CP-RC-V2

Concept Pro Large Junction Box Concept Pro Large Pendant Mount Concept Pro Large Wall Mount Concept Pro Pole Mount

Concept Pro Corner Mount Concept Pro Large In-ceiling/Tile Mount

Concept Pro Rain Cap

COMPATIBLE WITH **CONCEPT PRO** AHD RECORDING **RANGE**

CVP9325IREL-AHD2M-Z

Concept Pro Lite 2MP 4-in-1 Analogue Motorised External Dome Camera




ACCESSORIES

CP-TM-2-V2

Concept Pro Large In-ceiling/Tile Mount




DIMENSIONS




CP-BASE-2-V2

Concept Pro Large Junction Box










CP-PM-2-V2

Concept Pro Large Pendant Mount







CP-WM-2-V2

Concept Pro Large Wall Mount








CP-PLM-V2

Concept Pro Pole Mount (can be combined with CP-BASE-2-V2)








CP-CM-V2

Concept Pro Corner Mount (can be combined with CP-BASE-2-V2)







CP-RC-V2