



Concept Pro

| | | | |
|------------|--|-------------------|---------------|
| 5MP | 2.7-13.5mm Varifocal Lens | 30M IR | 4 in 1 |
|------------|--|-------------------|---------------|

CVP9329IREL-AHD5M CVP9329IREL-AHD5M-G

Concept Pro 5MP 4-in-1 Analogue Varifocal External Eyeball Camera

The CVP9329IREL-AHD5M model is a 4-in-1 analogue camera that has been designed to deliver the highest image quality for demanding external environments. This weather-resistant external eyeball features a varifocal lens, smart infrared LEDs with 30m illumination range, and provides crisp 5-megapixel video with true wide dynamic range and enhanced low light performance. This camera is also designed for excellent compatibility with the Concept Pro range of hybrid digital video recorders.

WDR

True Wide Dynamic Range

With true wide dynamic range, this camera can capture sharp images throughout the entire field of view, even when there are severe differences between light levels.

Enhanced Low Light Performance

This CCTV camera utilises an Enhanced Low Light CMOS sensor with greater light sensitivity, resulting in the camera capturing colour images long after standard CCTV cameras have switched to black and white night mode.

Four-in-one solution

Don't be tied down to any single analogue platform. With Concept Pro 4-in-1 cameras you have the freedom to install whichever CCTV platform you like, whether you install AHD, TVI, CVI, or traditional analogue systems.

KEY FEATURES

- ◆ Max. 20FPS @ 5MP
- ◆ 2.7-13.5mm Varifocal Lens
- ◆ Up to 30m Smart IR Illumination
- ◆ 4-in-1 Operation (AHD/TVI/CVI/CVBS)
- ◆ Enhanced Low Light Performance
- ◆ True Wide Dynamic Range

OTHER FEATURES

- ◆ DC12V/AC24V Dual Power Input
- ◆ Up the Coax Coaxitron Support
- ◆ AGC, 3D-DNR, BLC
- ◆ IP66-rated

ANALOGUE HD TYPICAL CABLE DISTANCE



| | 5MP | 2MP | 720P |
|--------------------|------------|------------|------------|
| COAX (RG59) | UP TO 500M | UP TO 500M | UP TO 500M |
| CAT5e | UP TO 200M | UP TO 305M | UP TO 350M |
| CAT6 | UP TO 200M | UP TO 305M | UP TO 350M |

*Approximate distances calculated using HD MasterBaluns. Actual transmission range will vary depending on type and quality of cable and baluns.

COMPATIBLE WITH

**CONCEPT PRO
AHD RECORDING
RANGE**

CVP9329IREL-AHD5M

CVP9329IREL-AHD5M-G

Concept Pro 5MP 4-in-1 Analogue
Varifocal External Eyeball Camera


Concept Pro

SPECIFICATION

| Model/Feature | CVP9329IREL-AHD5M / CVP9329IREL-AHD5M-G |
|---------------------------------|--|
| Image Sensor | 1/2.8" Progressive Scan CMOS |
| Video Output Type | AHD/TVI/CVI/CVBS |
| Signal System | PAL/NTSC |
| Min. Illumination | Colour: 0.02 lux (Enhanced Low Light) B&W: 0.02 lux (Enhanced Low Light) 0 lux with IR on |
| Camera | |
| Electronic Shutter | Auto |
| S/N Ratio | ≥50dB |
| IR LEDs | x4 |
| IR Illumination Range | Max. 30m |
| IR Control | On/Off |
| Adaptable IR | Auto |
| Pivot Axis | Pan: 0-349°, Tilt: 0-80°, Rotation: 0-360° |
| Lens Type | Manual Varifocal |
| Mount Type | Built-in |
| Focal Length | f=2.7-13.5mm |
| Lens | |
| Aperture | F1.3-F2.7 |
| Angle of View | H: 108.78°-28.76°, V: 57.22°-16.2°, D: 130.54°-33° |
| Focus | Auto/Manual |
| Iris | Fixed |
| Resolution | 5MP (2592x1944), 4MP (2560x1440), 2MP (1920 x 1080), SD (960 x 576) |
| Frame Rate | AHD/TVI: 12.5/20FPS @ 5MP, 15/25/30FPS @ 4MP, 25/30FPS @ 2MP CVI: 25/30FPS @ 4MP, 25/30FPS @ 2MP CVBS: 25/30FPS @ SD |
| Day/Night | True Day & Night with ICR (Auto/Colour/B&W/EXT) |
| Backlight Compensation | BLC/Global |
| Wide Dynamic Range | True WDR |
| White Balance | Pro/Gray World |
| Video | |
| Gain Control | Auto |
| Noise Reduction | 3D-DNR (Auto/Manual) |
| Motion Detection | - |
| Defog | - |
| Image Setting | Mirror |
| Image Adjustment | Brightness, Sharpness, Contrast, Saturation |
| Privacy Masking | - |
| Sens-Up | - |
| Transmission Distance | Max. 500m (1Vp-p 75Ω) |
| Video Output | x1 1.0Vp-p 75Ω BNC (AHD/TVI/CVI/CVBS) |
| Interface | |
| Audio Interface | - |
| RS-485 | - |
| Control Protocol | N/A |
| Up the Coax (Coaxitron) Support | Yes |
| OSD Buttons | Yes |
| Power Supply | DC12V±10%/AC24V±10% |
| Power Output | - |
| Power Consumption | Max. 4.8W |
| Operating Temperature | -30°C to +50°C |
| Operating Humidity | 20-80% RH |
| Ingress Protection | IP66 |
| General | |
| Impact Resistance | - |
| Housing Materials | Aluminum Diecasting |
| RAL | CVP9329IREL-AHD5M: RAL 9010 Pure White CVP9329IREL-AHD5M-G: RAL 7021 Black Grey |
| Dimension | Ø120 x (H) 105.5mm |
| Net Weight | ≈500g |
| Gross Weight | ≈650g |
| Certification | |
| Certifications | CE |

DIMENSIONS

All measurements are in mm.

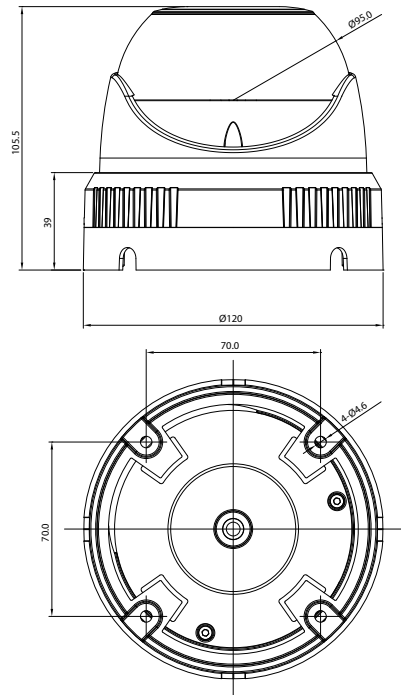

ORDER CODE

- **CVP9329IREL-AHD5M** Concept Pro 5MP 4-in-1 Analogue Varifocal External Eyeball Camera
- **CVP9329IREL-AHD5M-G** Concept Pro 5MP 4-in-1 Analogue Varifocal External Eyeball Camera (Black Grey)

OTHER PRODUCTS IN THE RANGE

- **CVP9329IREL-AHD2M** Concept Pro Lite 2MP 4-in-1 Analogue Varifocal External Eyeball Camera
- **CVP9329IREL-AHD2M-G** Concept Pro Lite 2MP 4-in-1 Analogue Varifocal External Eyeball Camera (Black-Grey)

RECOMMENDED ACCESSORIES

- **CP-BASE-1-V2** Concept Pro Small Junction Box
- **CP-BASE-1-V2-G** Concept Pro Small Junction Box - Black Grey
- **CP-WM-1-V2** Concept Pro Small Wall Mount
- **CP-WM-1-V2-G** Concept Pro Small Wall Mount - Black Grey
- **CP-PM-1-V2** Concept Pro Small Pendant Mount
- **CP-PM-1-V2-G** Concept Pro Small Pendant Mount - Black Grey
- **CP-PLM-V2** Concept Pro Pole Mount
- **CP-CM-V2** Concept Pro Corner Mount
- **RG59K-100** RG59 Coaxial Cable 100m (Black)
- **RG59K-500** RG59 Coaxial Cable 500m (Black)

COMPATIBLE
WITH



CONCEPT PRO
AHD RECORDING
RANGE

CVP9329IREL-AHD5M CVP9329IREL-AHD5M-G

Concept Pro 5MP 4-in-1 Analogue
Varifocal External Eyeball Camera

Concept  Pro


ACCESSORIES

DIMENSIONS

CP-BASE-1-V2

CP-BASE-1-V2-G


Concept Pro Small
Junction Box

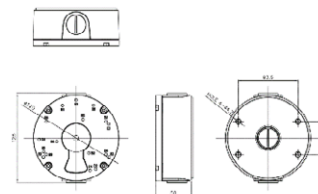

CP-PM-1-V2

CP-PM-1-V2-G



Concept Pro Small
Pendant Mount

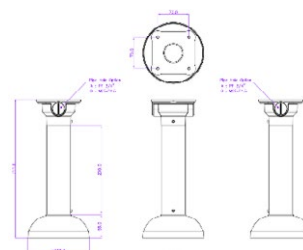

CP-WM-1-V2


CP-WM-1-V2-G

Concept Pro Small
Wall Mount

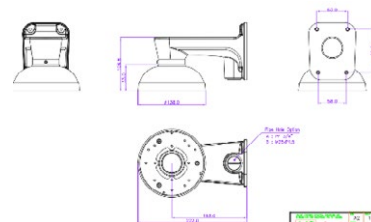

CP-PLM-V2

Concept Pro Pole Mount
(can be combined with
CP-BASE-1-V2)

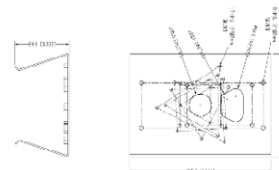

CP-CM-V2

Concept Pro Corner Mount
(can be combined with
CP-BASE-1-V2)

