

8MP

16CH PoE 4K Display Output

H.265

Alarm & Audio I/O





# **VUHDIP-16-3**

## Concept Pro 16 Channel 8MP NVR with PoE

The VUHDIP-16-3 model is a sixteen channel network video recorder designed to satisfy professional surveillance requirements. It has sixteen channels of PoE/PoE+ built-in, supports the latest H.265 video compression codec for greater storage and bandwidth savings, and provides real-time recording performance at up to 8-megapixel resolutions across all channels. It has an expanded alarm input interface, and is compatible with Deep Learning Plus.



#### **Professional Remote Monitoring**

Provides 24 hour remote monitoring for clients and is available on all Concept Pro recorders with Alarm Receiving Stations using Immix Cloud and Sentinel platforms.



### **Deep Learning Video Analytics**

This product supports the latest Deep Learning video analytics technology when compatible Concept Pro IP cameras are connected. Easily configure Deep Learning Motion Detection and advanced video analytics rules from the recorder user interface and begin reducing false alarms by up to 95% with the power of Deep Learning.



### **Enhanced Security**

This product supports a suite of security-related features, including automatic password expiration, encryption, and more settings designed to ensure authorised users are accessing the device.



### **NDAA-compliant**

This product uses the latest in chipset technology from Taiwan and is developed in South Korea without the use of restricted components.

### **KEY FEATURES**

- 16 PoE/PoE+ IP Camera Inputs
- H.265 & H.264 Video Codec Support
- Real-time 8MP Recording for all Channels
- Max. 3840x2160 4K UHD Display Output
- Up to 20TB Internal Hard Disk Capacity
- Smart Storage Compression
- x1/x1 Audio I/O with HDMI Audio Output
- x8/x1 Alarm I/O
- Compatible with Concept Pro Deep Learning Video Analytics & Deep Learning Plus
- WD Purple Surveillance Hard Disks Pre-installed

### **OTHER FEATURES**

- NDAA-compliant
- Remote Monitoring via Concept Pro Viewer Mobile App
- Supported by i-PIMS license-free VMS
- Timeline, Thumbnail, Event, and Deep Learning Search Modes
- Instant Playback
- Integrated Virtual Alarm Support
- Mouse and remote included
- Total 180W PoE Capacity

COMPATIBLE WITH

HD-IP Professional System Camera Range

# **VUHDIP-16-3**

Concept Pro 16 Channel 8MP NVR with PoE



### **SPECIFICATION**

VUHDIP-16-3
x16
PAL/NTSC
Max. 25/30FPS @ 3840x2160 (8MP 4K UHD) per channel H.265/H.264 (BP, MP, HP)
Max. 148Mbps
CBR/VBR/+
Stream 1: 1,000-8,000Kbps
Stream 2: 600-2,000Kbps
x16
PoE 802.3af/802.3at
Max. 25W per channel Max. 180W total
Supported, Network/RS485 (Pan/Tilt/Zoom, Scan, Tour, Preset Add/
Delete/Sync)
x1 (RCA) + x16 (IP Camera Audio Input)
x1 (RCA)/x1 (HDMI)
Supported
G.711µ-law
8MP (3840x2160)/5MP/4MP/3MP/2MP/1MP/D1/CIF
Max. 400/480FPS @ 3840x2160 (8MP 4K UHD)
Automatic/Manual Recording Profiles with Continuous, Motion, Deep Learning/Alarm, Panic Modes
Hourly/Daily/Weekly
Yes, 0/1/2/3/4/5/10/15s
Yes, 5/10/15/20/30/60/180s
Supported
HDMI x1, VGA x1
3840x2160/2560x1440/1920x1080/1280x124/1280x720
Auto/Manual
Main Display Mirroring
Max. 400/480FPS; Max. 60FPS@8MP
1CH/4CH/5CH/6CH/9CH/16CH
Supported, 1CH/4CH/5CH/6CH/9CH/16CH
BNC x1
Customisable, 1CH/4CH Split Screen Modes
Calendar (Date/Time), Timeline, Thumbnail, Event, Text-in (POS), Dee
Learning
Alarm, Video, System, Network, Setup, Motion, Record, Storage, IPCAM, POS/ATM
Event Type, Object/Keyword
Max. 400/480FPS; Max. 60FPS@8MP
1CH/4CH/5CH/6CH/9CH/16CH
1x/2x/4x/8x/16x/32x/64x
Yes, via Live Menu Timeline or Quick Menu
USB, FTP
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App RAW/AVI
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App RAW/AVI Max. 20GB
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App RAW/AVI Max. 20GB MD5 with Built-in Verification Watermark
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App RAW/AVI Max. 20GB MD5 with Built-in Verification Watermark Live, Playback (JPEG)
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App RAW/AVI M. 20GB MD5 with Built-in Verification Watermark Live, Playback (JPEG) Supported
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App RAW/AVI Max. 20GB MD5 with Built-in Verification Watermark Live, Playback (JPEG)
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App RAW/AVI Max. 20GB MD5 with Built-in Verification Watermark Live, Playback (JPEG) Supported Supported
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App RAW/AVI Max. 20GB MD5 with Built-in Verification Watermark Live, Playback (JPEG) Supported Supported x2 RJ45 10/100/1000M Ethernet
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App RAW/AVI Max. 20GB MD5 with Built-in Verification Watermark Live, Playback (JPEG) Supported Supported x2 RJ45 10/100/1000M Ethernet x10
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App RAW/AVI Max. 20GB MD5 with Built-in Verification Watermark Live, Playback (JPEG) Supported Supported x2 RJ45 10/100/1000M Ethernet x10 Max. 400/480FPS
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App RAW/AVI Max. 20GB MD5 with Built-in Verification Watermark Live, Playback (JPEG) Supported Supported x2 RJ45 10/100/1000M Ethernet x10 Max. 400/480FPS Supported
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App RAW/AVI Max. 20GB MD5 with Built-in Verification Watermark Live, Playback (JPEG) Supported Supported x2 RJ45 10/100/1000M Ethernet x10 Max. 400/480FPS Supported Max. 72Mbps
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App RAW/AVI Max. 20GB MD5 with Built-in Verification Watermark Live, Playback (JPEG) Supported Supported x2 RJ45 10/100/1000M Ethernet x10 Max. 400/480FPS Supported
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App RAW/AVI Max. 20GB MD5 with Built-in Verification Watermark Live, Playback (JPEG) Supported Supported x2 RJ45 10/100/1000M Ethernet x10 Max. 400/480FPS Supported Max. 72Mbps IPv4, IPv6
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App RAW/AVI MAX. 20GB MD5 with Built-in Verification Watermark Live, Playback (JPEG) Supported Supported x2 RJ45 10/100/1000M Ethernet x10 Max. 400/480FPS Supported Max. 72Mbps IPv4, IPv6 Supported
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App RAW/AVI Max. 20GB MD5 with Built-in Verification Watermark Live, Playback (JPEG) Supported Supported  x2 RJ45 10/100/1000M Ethernet x10 Max. 400/480FPS Supported Max. 72Mbps IPv4, IPv6 Supported Internet Explorer: Live Video, Search, Playback, Setup Chrome, Firefox: Live JPEG, Setup Concept Pro Viewer (iOS/Android)
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App RAW/AVI Max. 20GB MD5 with Built-in Verification Watermark Live, Playback (JPEG) Supported Supported  x2 RJ45 10/100/1000M Ethernet x10 Max. 400/480FPS Supported Max. 72Mbps IPv4, IPv6 Supported Internet Explorer: Live Video, Search, Playback, Setup Chrome, Firefox: Live JPEG, Setup Concept Pro Viewer (IOS/Android) i-PIMS CMS
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App RAW/AVI Max. 20GB MD5 with Built-in Verification Watermark Live, Playback (JPEG) Supported Supported  x2 RJ45 10/100/1000M Ethernet x10 Max. 400/480FPS Supported Max. 72Mbps IPv4, IPv6 Supported Internet Explorer: Live Video, Search, Playback, Setup Chrome, Firefox: Live JPEG, Setup Concept Pro Viewer (IOS/Android) i-PIMS CMS Yes, European Servers
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App RAW/AVI Max. 20GB MD5 with Built-in Verification Watermark Live, Playback (JPEG) Supported Supported  x2 RJ45 10/100/1000M Ethernet x10 Max. 400/480FPS Supported Max. 72Mbps IPv4, IPv6 Supported Internet Explorer: Live Video, Search, Playback, Setup Chrome, Firefox: Live JPEG, Setup Concept Pro Viewer (IOS/Android) i-PIMS CMS Yes, European Servers Yes, DVRLINK Included
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App RAW/AVI Max. 20GB MD5 with Built-in Verification Watermark Live, Playback (JPEG) Supported Supported  x2 RJ45 10/100/1000M Ethernet x10 Max. 400/480FPS Supported Max. 72Mbps IPv4, IPv6 Supported Internet Explorer: Live Video, Search, Playback, Setup Chrome, Firefox: Live JPEG, Setup Concept Pro Viewer (iOS/Android) i-PIMS CMS Yes, European Servers Yes, DVPLINKI Included Immix, Monitorsoft Sentinel
Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App RAW/AVI Max. 20GB MD5 with Built-in Verification Watermark Live, Playback (JPEG) Supported Supported  x2 RJ45 10/100/1000M Ethernet x10 Max. 400/480FPS Supported Max. 72Mbps IPv4, IPv6 Supported Internet Explorer: Live Video, Search, Playback, Setup Chrome, Firefox: Live JPEG, Setup Concept Pro Viewer (IOS/Android) i-PIMS CMS Yes, European Servers Yes, DVRLINK Included

SPECIFICATION/MODEL	VUHDIP-16-3
EVENT	VUNDIF-10-3
Alarm Inputs	x8 (NVR) + x16 (IP Camera)
Alarm Outputs	x1 (NVR Relay) + x16 (IP Camera)
Alarm Event Triggers	Alarm Recording, Alarm Output, PTZ Preset, E-mail/Mobile Push/FTP Event Notification, Video/OSD Pop-up, Buzzer
Basic Motion Detection	Supported (Depending on IP Camera Specification)
Deep Learning Motion Detection	Supported (Select Concept Pro IP Camera Models)
DL Motion Detection Objects	Human/Car/Bike
Motion Event Triggers	Motion Recording, Alarm Output, PTZ Preset, E-mail/Mobile Push/FTP Event Notification, Buzzer  Video Loss, Disk Overwrite Start, Disk Full, Disk Space x% Exhausted,
System Event Types	HDD SMART, No Disk, Panic, Peacr Start, Booting, Login Fail, PoE Fail, Trouble in Internet Connection, Fail in DDNS Update, IP Conflict
POS/ATM Events	Supported
Deep Learning Events	Concept Pro Deep Learning Plus & Deep Learning IP Cameras Supported
Deep Learning Objects	Human/Car/Bike
Deep Learning Rule Types	Forward/Reverse Line Crossing, Intrusion, Region Enter/Exit, Loitering, Stopping, Counter
Deep Learning Live Timeline	Supported, with Object Thumbnails & Instant Playback
Deep Learning Event Triggers	DL/Alarm Recording, Alarm Out, Preset, Buzzer, Video Popup, E-mail Notification, FTP Notification, Mobile App Push Message
Deep Learning Double Knock  E-mail Notification	Supported  Yes, Snapshot Optional
E-mail Notification Schedule	Yes, Max. 10 Schedule Profiles
Alarm Arm/Disarm Function	Supported
STORAGE	
Internal Hard Disk	SATA x2, Max. 20TB
Hard Disk Health Monitoring	Yes (SMART)
RAID Configuration	No, please see VUHDIPE model
Partial Data Deletion	Supported
External Storage Support	FTP (Backup)
SECURITY Enhanced Security Rules	Supported, enabled by default
Covert Channels	Supported, configurable by user and group authority
Privacy Masking	Supported (Select Concept Pro IP Camera Models)
User Groups	Admin/Manager/User
Number of Users	Max. x10
Group Authority	Search, Archiving, System Setup, Record Setup, Event Action Control Listen to Audio, Microphone, Remote Login, PTZ Control, Shutdown
Network Security	Unrequired network protocols off by default (SNMP, FTP, DDNS, P2P, etc.), RTSP encryption (SEED_128), HTTPS Digest, IP filter, Netstat, Ping test, IP conflict list, Live connected clients list with lockout, Auto Port Forwarding off by default
System Security	Required ADMIN password change, password recovery e-mail authentication, enhanced user ID/password on by default, direct user ID input on by default, audio transmission and recording off by default, auto logout, password expiration, system log, user authority, password check for search/backup, password check for disk management, Encrypted System Settings File Import/Export
INTERFACE USB	x2 (Front)
RS-485	x1 (Pelco-D, Pelco-P, D-max, etc.)
Keyboard Controller	Supported (RS-485)
Remote Control	Included
RS-232	
SYSTEM	
Language	English, Spanish, German, French, Dutch, Italian, Korean, Chinese, Japanese, Polish
Max. UTP Transmission	90m
Firmware Upgrade	USB, Network
Operating System	Concept Pro User Interface, NDAA-compliant SoC
Operating System GENERAL	
Operating System GENERAL Power Supply	SMPS 51V/200W
Operating System GENERAL Power Supply Power Consumption	SMPS 51V/200W  Max. 16W without HDD or cameras
Operating System GENERAL Power Supply Power Consumption Fan	SMPS 51V/200W  Max. 16W without HDD or cameras  x1
Operating System GENERAL Power Supply Power Consumption	SMPS 51V/200W  Max. 16W without HDD or cameras  x1  1U, (W) 380mm x (D) 314.6mm x (H) 44mm
Operating System GENERAL Power Supply Power Consumption Fan Dimensions	SMPS 51V/200W  Max. 16W without HDD or cameras  x1
Operating System GENERAL Power Supply Power Consumption Fan Dimensions Rack Mount	SMPS 51V/200W  Max. 16W without HDD or cameras  x1  1U, (W) 380mm x (D) 314.6mm x (H) 44mm  Supported

# COMPATIBLE WITH








## **VUHDIP-16-3**

Concept Pro 16 Channel 8MP NVR with PoE




### **DIMENSIONS**

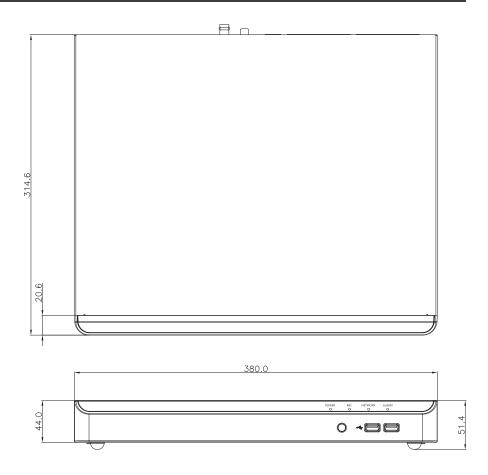

#### ORDER CODE

• VUHDIP-16-3/1000	Concept Pro 16 Channel 8MP NVR 1TB
• VUHDIP-16-3/2000	Concept Pro 16 Channel 8MP NVR 2TB
• VUHDIP-16-3/3000	Concept Pro 16 Channel 8MP NVR 3TB
• VUHDIP-16-3/4000	Concept Pro 16 Channel 8MP NVR 4TB
• VUHDIP-16-3/6000	Concept Pro 16 Channel 8MP NVR 6TB
• VUHDIP-16-3/8000	Concept Pro 16 Channel 8MP NVR 8TB
• VUHDIP-16-3/10000	Concept Pro 16 Channel 8MP NVR 10TB
• VUHDIP-16-3/12000	Concept Pro 16 Channel 8MP NVR 12TB
• VUHDIP-16-3/16000	Concept Pro 16 Channel 8MP NVR 16TB
• VUHDIP-16-3/20000	Concept Pro 16 Channel 8MP NVR 20TB

## **REAL PANEL**



# COMPATIBLE WITH





