



Up to 8MP Max 20TB Storage







# VXH8AHD-8

# Concept Pro 8 Channel 8MP Hybrid DVR

The Concept Pro VXH8AHD-8 model is a eight channel professional DVR that can record up to 8 megapixel analogue video and 8 megapixel IP video on all channels. It is a hybrid recorder compatible with AHD, HD-TVI, traditional standard definition analogue cameras, and IP cameras. Additionally, the recorder features eight alarm inputs. The DVR offers a range of features suited for advanced applications, including remote monitoring station integration, P2P connectivity for remote viewing on mobile devices, and compatibility with the license-free i-PIMS VMS.



## **Professional Remote Monitoring**

Provides 24 hour remote monitoring for clients and is available on all Concept Pro recorders with Alarm Receiving Stations using Immix Cloud and Sentinel platforms.



### Remote Viewing & Video Management

Connect up to 254 Concept Pro IP and AHD recorders through i-PIMS, a powerful license free video management software. Remote viewing is also available on smart phones and tablets through Concept Pro Viewer, utilising a secured European server, the app allows control over various elements of Concept Pro recorder.



#### **IP Hybrid Support**

This Concept Pro DVR provides the facility to record various types of analogue and IP cameras up to 8-megapixel resolution to one recording device and work as one system.



### **Enhanced Security**

This product supports a suite of security-related features, including automatic password expiration, encryption, and more settings designed to ensure authorised users are accessing the device.

### **KEY FEATURES**

- 8 Channel Hybrid DVR
- AHD, TVI, CVBS and IP Compatible
- Max. 64FPS @ 8MP Recording
- 4K HDMI and VGA Display Output
- CVBS Spot Monior Output
- Up to 20TB Internal Hard Disk
- x8 Alarm input/X1 Alarm Output
- X4 Audio Input/X1 Audio Output
- Compatible with Concept Pro Deep Learning IP Cameras & Deep Learning Plus
- WD Purple Surveillance HDD's inside all recorders (NDAA Compliant)

### **OTHER FEATURES**

- Secure P2P/Relay Server Service
- Two Way Audio & Audio Recording
- Remote Monitoring via Concept Pro Viewer Mobile App
- Supported by i-PIMS License-free VMS
- Thumbnail and Event Search
- Instant Playback
- Up the Coax (Coaxitron) Protocol Support
- RS-485 X1



# **VXH8AHD-8**

# Concept Pro 8 Channel 8MP Hybrid DVR



## SPECIFICATION

Video and Audio Inputs/Outputs	3		
Analogue Camera Video Inputs	8CH		
Supported Analogue Formats	AHD/TVI/CVBS		
Supported Video Signal Types	PAL/NTSC PAL/NTSC		
Supported Analogue	8MP@20/12,FPS, 5MP@20/12FPS, 4MP@25/15FPS,		
Resolution/Frame Rate	3MP@25/18FPS,2MP@25FPS, 960H@25FPS		
IP Camera Video Inputs	Max. 16CH		
Supported IP Camera Resolution/Frame Rate	Max. 8MP@12FPS, Max. 4MP@25FPS		
Supported PTZ Protocols	· · · · · · · · · · · · · · · · · · ·		
Audio Inputs	UTC Coaxitron, RS-485 (Pelco-D, Pelco-P, and more)		
Audio Outputs	4CH RCA 1CH RCA + HDMI		
Two-Way Audio	Supported		
Audio Compression Codec	G.711u		
Recording	G.F.F.Tu		
Video Compression Codec	H.265/H.264		
Recording Resolution	8MP, 5MP, 4MP, 3MP, 2MP, 1MP, 960H, D1, 2CIF, CIF		
	[Analogue]		
	Max. 64FPS@8MP (3840x2160)		
	Max. 80FPS@5MP (2592x1944)		
	Max. 100FPS@4MP (2560x1440) Max. 200FPS@2MP (1920x1080)		
Recording Rate	[IP]		
	Max. 200FPS@8MP (3840x2160)		
	Max. 200FPS@5MP (2592x1944) Max. 400FPS@4MP (2592x1520)		
	Max. 200FPS@2MP (2592X1520) Max. 200FPS@2MP (1920x1080)		
Bit Rate	CBR/VBR		
Recording Modes	Continuous, Motion, Alarm, Panic		
Recording Scheduling Method	Hourly/Daily/Weekly		
Pre-Event Recording	0/1/2/3/4/5/10/15s		
Post-Event Recording	5/10/15/20/30/60/180s		
Display			
Main Display Outputs	HDMI 1EA, VGA 1EA		
Main Display Resolution	HDMI: 3840x2160, 2560x1440, 1920x1080, 1280x1024, 1280x720		
	VGA: 1920x1080, 1280x1024, 1280x720		
Main Display Resolution Configuration	Auto/Manual		
Dual Monitor Functions	Duplicate Display		
Loop Through	-		
200p Hillough	Max. 100FPS@8MP		
Display Rate	Max. 200FPS@5MP		
Display Flate	Max. 200FPS@4MP		
Diaplay Mada	Max. 200FPS@2MP		
Display Mode Programmable Sequence	1CH/4CH/6CH/8CH/9CH/16CH Supported, 1CH/4CH/6CH/8CH/9CH/16CH		
Spot Monitor Output	x1 BNC Spot Out		
Spot Monitor View Type	Programmable, 1CH/4CH		
Search & Playback	1 Togrammable, 1011/4011		
	Calendar (Date/Time HH:MM:SS), Timeline, Thumbnail, Event, Text-in,		
Search Modes	Deep Learning Search		
Event Search Options	All, Alarm, Motion, Video, Record, System, Storage, Network, Setup		
Playback Preview from Search	Yes		
Menu Biarday Mada			
Playback Display Mode	1CH/4CH/6CH/8CH/9CH/16CH		
	[Analogue] Max. 64FPS@8MP (3840x2160)		
	Max. 80FPS@5MP (2592x1944)		
	Max. 100FPS@4MP (2560x1440)		
Playback Rate	Max. 200FPS@2MP (1920x1080)  IP		
	Max. 200FPS@8MP (3840x2160)		
	Max. 200FPS@5MP (2592x1944)		
	Max. 400FPS@4MP (2592x1520) Max. 200FPS@2MP (1920x1080)		
Playback Speed	1x, 2x, 4x, 8x, 16x, 32x, 64x		
Archiving Archiving	17, 27, 77, 07, 107, 027, 077		
Archiving Devices	USB, FTP		
	Web, i-PIMS (PC), FTP		
Remote Archiving			
Remote Archiving Archived Video Format	RAW/AVI		
	RAW/AVI MD5, with Built-in Verification		
Archived Video Format			
Archived Video Format Watermarking			
Archived Video Format Watermarking Network	MD5, with Built-in Verification  1EA RJ-45 10M/100M/1000MBASE-TX  32 users		
Archived Video Format Watermarking Network Network Interface	MD5, with Built-in Verification  1EA RJ-45 10M/100M/1000MBASE-TX  32 users  Internet Explorer (Live 1CH/4CH/6CH/8CH/9CH), Search, Playback,		
Archived Video Format Watermarking Network Network Interface Max. User Connections	MD5, with Built-in Verification  1EA RJ-45 10M/100M/1000MBASE-TX  32 users		


	Chrome, Firefox (Live 1CH Second Stream, Setup)		
Smart Phone Mobile App	Concept Pro Viewer (iOS/Android)		
Remote Software	i-PIMS (PC)		
Transmission Rate	Max. 400FPS		
Adaptive Network Streaming	Yes		
P2P/Relay Server Cloud Service	Yes		
Dual SMTP E-mail Server	Yes Suraviaw Immiy Manitareaft Santinal		
Remote Monitoring	Sureview Immix, Monitorsoft Sentinel		
Interoperability P Address System	ONVIF Profile S, HTTP/RTSP API  IPv4/IPv6		
Network Protocols	RTP, RTSP, RTCP, SMTP, NTP, HTTPS, FTP, DDNS, DHCP, UPnP		
Streaming Method	Unicast/Multicast		
Alarm Interface and Event			
Notification			
Alarm Inputs Alarm Input Trigger Actions	x8  Alarm Recording, Alarm Output, PTZ Preset, Event Notification		
Alarm Outputs	x1 Relay		
Motion Detection	Supported, 22x18 Cells		
Motion Detection Trigger Actions	Motion Recording, Alarm Output, PTZ Preset, Event Notification		
Deep Learning Motion Detection	Supported (select Concept Pro IP Camera models); human/car/bike		
Deep Learning Video Analytics	classification  Compatible with Deep Learning Compatible with Deep Learning Companies and Concept Pro Deep Learning		
Event Notification	IP Cameras  Buzzer, Video Pop-up, OSD Pop-up, E-mail, FTP, Mobile Push		
E-mail Notification	Text-only/Snapshot Included		
E-mail Notification Schedule	Up to 10 Schedule Profiles		
Alarm Arm/Disarm Switch	Yes		
Video Loss Detection	Yes		
Disk Event Detection	Overwrite Start, Disk Full, % Disk Space Exhausted, SMART, No Disk		
Record Event Detection System Event Detection	Panic Record Start  Booting, Log-in Fail		
Network Event Detection	Trouble in Internet Connection, Remote Log-in Fail, DDNS Update Fail,		
Storage	IP Conflict		
Internal Hard Disk	SATA 2EA, Max. 24TB		
SMART Support	Yes, Manual/Automatic		
eSATA	-		
Security			
Enhanced Security Rules	Direct ID Input, Enhanced User ID/Password Rules, Pin Code Login, E-mail Password Recovery, Security Questions Password Recovery		
Covert Camera	Supported, Configurable by User and Group Authority		
Privacy Masking	Yes, Max. 4 Areas		
Group Authority	Search, Archiving, System Setup, Record Setup, Event Action Control, Audio, Remote Access, Shutdown		
IP Filter	Yes		
Record Time Limit	Yes		
Erase Video RTSP Encryption	Yes SEED_128		
HTTPS	Basic/Digest Authentication		
Password Expiration	Off/On (1/2/4/6 Months)		
Auto Log-out	Off/On (1/2/3/5/10 Minutes)		
Search/Archiving Password	Off/On		
Check Audio Support Toggle	Yes		
Snapshot Support Toggle	Yes		
Auxiliary Interface			
USB	x2 (Front)		
RS-485	x1 Relay		
RS-232	-		
Remote Control	Yes (Included)		
Keyboard Controller	Yes (VA-KBDPRO+)		
General			
General Power Supply			
Power Supply	DC12V/3A Max. 15W without HDD		
	DC12V/3A		
Power Supply Power Consumption	DC12V/3A Max. 15W without HDD		
Power Supply Power Consumption Dimensions	DC12V/3A Max. 15W without HDD 380mm (W) x 314.6mm (D) x 44mm (H)		
Power Supply Power Consumption Dimensions Net Weight Gross Weight Operating Conditions	DC12V/3A Max. 15W without HDD 380mm (W) x 314.6mm (D) x 44mm (H) 2.58kg		
Power Supply Power Consumption Dimensions Net Weight Gross Weight	DC12V/3A Max. 15W without HDD 380mm (W) x 314.6mm (D) x 44mm (H) 2.58kg 3.69kg		

## VXH8AHD-8

# Concept Pro 8 Channel 8MP Hybrid DVR



#### **DIMENSIONS**

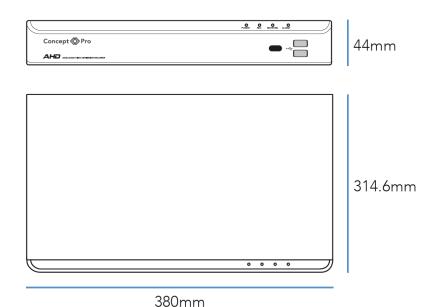

### **ORDER CODES**

- VXH8AHD-8/1000 Concept Pro 8 Channel 8MP Hybrid DVR 1TB
- VXH8AHD-8/2000 Concept Pro 8 Channel 8MP Hybrid DVR 2TB
- VXH8AHD-8/3000 Concept Pro 8 Channel 8MP Hybrid DVR 3TB
- VXH8AHD-8/4000 Concept Pro 8 Channel 8MP Hybrid DVR 4TB
- VXH8AHD-8/6000 Concept Pro 8 Channel 8MP Hybrid DVR 6TB
- VXH8AHD-8/8000 Concept Pro 8 Channel 8MP Hybrid DVR 8TB
- VXH8AHD-8/10000 Concept Pro 8 Channel 8MP Hybrid DVR 10TB
- VXH8AHD-8/12000 Concept Pro 8 Channel 8MP Hybrid DVR 12TB
- VXH8AHD-8/16000 Concept Pro 8 Channel 8MP Hybrid DVR 16TB
- VXH8AHD-8/20000 Concept Pro 8 Channel 8MP Hybrid DVR 20TB
- VXH8AHD-8/24000 Concept Pro 8 Channel 8MP Hybrid DVR 24TB

#### **ANALOGUE HD TYPICAL CABLE DISTANCE**



	5MP	2MP	720P
COAX (RG59)	UP TO 500M	UP TO 500M	UP TO 500M
CAT5e	UP TO 200M	UP TO 305M	UP TO 350M
CAT6	UP TO 200M	UP TO 305M	UP TO 350M

<sup>\*</sup>Approximate distances calculated using HD MasterBaluns. Actual transmission range will vary depending on type and quality of cable and baluns.