Concept Pro

4CH POE

8MP

4K Display Output

H.265

x2/x1 Alarm I/O





VUHDIPL-4-2

Concept Pro Lite 4 Channel 8MP NVR with PoE

The VUHDIPL-4-2 model is a four channel network video recorder designed to satisfy most entry-level to professional requirements. It has four channels of PoE/PoE+ built-in, supports the latest H.265 video compression codec for greater storage and bandwidth savings, and provides real-time recording performance at up to 8-megapixel resolutions across all channels.



Professional Remote Monitoring

Provides 24 hour remote monitoring for clients and is available on all Concept Pro recorders with Alarm Receiving Stations using Immix Cloud and Sentinel platforms.



Deep Learning Video Analytics

This product supports the latest Deep Learning video analytics technology when compatible Concept Pro IP cameras are connected. Easily configure Deep Learning Motion Detection and advanced video analytics rules from the recorder user interface and begin reducing false alarms by up to 95% with the power of Deep Learning.



NDAA Compliant

This product uses the latest in chipset technology from Taiwan and is developed in South Korea without the use of restricted components.



Enhanced Security

This product supports a suite of security-related features, including automatic password expiration, encryption, and more settings designed to ensure authorised users are accessing the device.


KEY FEATURES

- 4 PoE/PoE+ IP Camera Inputs
- H.265 & H.264 Video Codec Support
- Real-time 8MP Recording for all Channels
- Max. 3840x2160 4K UHD Display Output
- Up to 10TB Internal Hard Disk Capacity
- Smart Storage Compression
- Audio Recording & HDMI Audio Out
- x2/x1 Alarm I/O
- Compatible with Concept Pro Deep Learning Video Analytics
- WD Purple Surveillance Hard Disks Preinstalled

OTHER FEATURES

- NDAA-compliant
- Remote Monitoring via Concept Pro Viewer Mobile App
- Supported by i-PIMS license-free VMS
- Timeline, Thumbnail, Event, and Deep Learning Search Modes
- Instant Playback
- Integrated Virtual Alarm Support
- Mouse and remote included
- Total 38W PoE Capacity
- - Fanless Design






SPECIFICATION

Video and Audio		Event	0 (A) (D) (100 0
IP Video Inputs	x4	Alarm Inputs	x2 (NVR) + x4 (IP Camera)
Video Signal	PAL/NTSC	Alarm Outputs	x1 (NVR Relay) + x4 (IP Camera) Alarm Recording, Alarm Output, PTZ Preset, E-mail/Mobile
Max. Resolution/Frame Rate	Max. 25/30FPS @ 3840x2160 (8MP 4K UHD) per channel	 Alarm Event Triggers 	Push/FTP Event Notification, Video/OSD Pop-up, Buzzer
Video Compression Codec	H.265/H.264 (BP, MP, HP)	Basic Motion Detection	Supported (Depending on IP Camera Specification)
Incoming Bandwidth Bit Rate Control	Max. 37Mbps CBR/VBR/VBR+	Deep Learning Motion	
Bit Rate Control	Stream 1: 1.000-8.000Kbps	Detection	Supported (Select Concept Pro IP Camera Models)
Bit Rate per Channel	Stream 1: 1,000-8,000kbps Stream 2: 600-2,000Kbps	DL Motion Detection	Human/Car/Bike
Power over Ethernet (PoE) Inputs	x4	Objects Motion Event Triggers	Motion Recording, Alarm Output, PTZ Preset, E-mail/Mobile
PoE Standard	PoE 802.3af/802.3at Max. 25W per channel	- Wollon Event Higgers	Push/FTP Event Notification, Buzzer Video Loss, Disk Overwrite Start, Disk Full, Disk Space x%
PoE Output	Max. 25W per challing Max. 38W total Supported, Network/RS485 (Pan/Tilt/Zoom, Scan, Tour,	- System Event Types	Exhausted, HDD SMART, No Disk, Panic Record Start, Booting, Login Fail, PoE Fail, Trouble in Internet Connection, Fail in DDNS
PTZ Cameras Audio Inputs	Preset Add/Delete/Sync) x4 (IP Camera Audio Input)	POS/ATM Events	Update, IP Conflict Supported
Audio Outputs	x1 (HDMI)	Deep Learning Events	Concept Pro Deep Learning IP Cameras Supported
Two-way Audio	- (1 DIVII)	Deep Learning Objects	Human/Car/Bike
Audio Compression Codec	G.711μ-law		Forward/Reverse Line Crossing, Intrusion, Region Enter/Exit,
Recording	G.7 T p law	Deep Learning Rule Types	Loitering, Stopping, Counter
Recording Resolution	8MP (3840x2160)/5MP/4MP/3MP/2MP/1MP/D1/CIF	Deep Learning Live Timeline	Supported, with Object Thumbnails & Instant Playback
Recording Rate	Max. 100/120FPS @ 3840x2160 (8MP 4K UHD)	Deep Learning Event	DL/Alarm Recording, Alarm Out, Preset, Buzzer, Video Popup,
	Automatic/Manual Recording Profiles with	_Triggers	E-mail Notification, FTP Notification, Mobile App Push Message
Recording Modes	Continuous, Motion, Deep Learning/Alarm, Panic Modes	Deep Learning Double	Supported
Recording Scheduling	Hourly/Daily/Weekly	Knock	· ·
Pre-Event Recording	Yes, 0/1/2/3/4/5/10/15s	E-mail Notification	Yes, Snapshot Optional
Post-Event Recording	Yes, 5/10/15/20/30/60/180s	E-mail Notification Schedule	Yes, Max. 10 Schedule Profiles
Smart Storage Compression	Supported	Alarm Arm/Disarm Function	Supported
(SSC)	Supported	Storage	0.174 (.14 (0.77)
Display		Internal Hard Disk	SATA x1, Max. 10TB
Main Display Outputs	HDMI x1, VGA x1	Hard Disk Health Monitoring	Yes (SMART)
Display Resolution	3840x2160/2560x1440/1920x1080/1280x124/1280x720	RAID Configuration	No, please see VUHDIPE model
Display Configuration	Auto/Manual	Destini Deta Deletion	O
Dual Monitor Functionality	Main Display Mirroring	Partial Data Deletion	Supported
Display Decoding Rate	Max. 100/120FPS; Max. 30FPS@8MP	Futarnal Ctarage Cumpart	ETD (Dools up)
Split Screen Mode	1CH/4CH	External Storage Support Security	FTP (Backup)
Programmable Sequence Spot Monitor Output	Supported, 1CH/4CH	Enhanced Security Rules	Supported, enabled by default
Spot Monitor Mode	 N/A	Covert Channels	Supported, configurable by user and group authority
Search & Playback	IVA	Privacy Masking	Supported (Select Concept Pro IP Camera Models)
	Calendar (Date/Time), Timeline, Thumbnail, Event, Text-in	User Groups	Admin/Manager/User
Search Modes	(POS), Deep Learning	Number of Users	Max. x10
Event Search Options	Alarm, Video, System, Network, Setup, Motion, Record, Storage, IPCAM, POS/ATM	Group Authority	Search, Archiving, System Setup, Record Setup, Event Action Control, Listen to Audio, Microphone, Remote Login, PTZ
Deep Learning Search Options	Event Type, Object/Keyword		Control, Shutdown Unrequired network protocols off by default (SNMP, FTP, DDNS,
Playback Decoding Rate	Max. 100/120FPS; Max. 30FPS@8MP	Notwork Coourity	P2P, etc.), RTSP encryption (SEED_128), HTTPS Digest, IP filter,
Split Screen Mode	1CH/4CH	- Network Security	Netstat, Ping test, IP conflict list, Live connected clients list with
Playback Speed	1x/2x/4x/8x/16x/32x/64x		lockout, Auto Port Forwarding off by default
Quick Playback	Yes, via Live Menu Timeline or Quick Menu		Required ADMIN password change, password recovery e-mail
Archiving			authentication, enhanced user ID/password on by default, direct user ID input on by default, audio transmission and recording off
Archiving Devices	USB, FTP	System Security	by default, auto logout, password expiration, system log, user
Remote Archiving	Web, i-PIMS (PC), FTP, Concept Pro Viewer Mobile App	- System Security	authority, password check for search/backup, password check
Archived Video Format	RAW/AVI		for disk management, Encrypted System Settings File Import/
Archive File Size	Max. 20GB		Export
Backup Encryption	MD5 with Built-in Verification Watermark	Interface	
Snapshot Bookmarking	Live, Playback (JPEG) Supported	USB	x2 (Front)
Reserved Data Management	Supported	RS-485	x1 (Pelco-D, Pelco-P, D-max, etc.)
Network	Oupported	Keyboard Controller	Supported (RS-485)
	v4 D IAE 40/400M Ell	Remote Control	Included
Network Interface	x1 RJ45 10/100M Ethernet	RS-232	
Max. User Connections Transmission Rate	x10 Max. 100/120FPS	System	
Adaptive Network Streaming	Supported		English, Spanish, German, French, Dutch, Italian, Korean,
Outgoing Bandwidth	Max. 72Mbps	Language	Chinese, Japanese, Polish
IP Address Support	IPv4, IPv6	Max. UTP Transmission	90m
Dual SMTP E-mail Server	Supported	Firmware Upgrade	USB, Network
Remote Web Access	Internet Explorer: Live Video, Search, Playback, Setup Chrome, Firefox: Live JPEG, Setup	Operating System General	Concept Pro User Interface, NDAA-compliant SoC
Mobile App	Concept Pro Viewer (iOS/Android)	Power Supply	DC48V/1A Power Adapter
PC Software	i-PIMS CMS	Power Consumption	Max. 6W without HDD or cameras
P2P Cloud Service	Yes, European Servers	Fan	(D) 000 0 (D) 000 0 (D) 000 0
DDNS Service	Yes, DVRLINK Included	Dimensions Deals Mayert	Mini 1U, (W) 260mm x (D) 262.6mm x (H) 44mm
Remote Monitoring	Immix, Monitorsoft Sentinel	Rack Mount	1 551/0
Interoperability	ONVIF Profile S, HTTP/RTSP SDK	Net Weight Operating Conditions	1.55kg 0°C to +40°C, 10%-90% Humidity (NC)
	WS-Discovery, RTP, RTSP, RTCP, SMTP, NTP, HTTP, FTP,	Certifications	CE, FCC
Supported Protocols	DDNS, DHCP, uPNP (Router Port Forwading), HTTPS, SSL	- Cor unoquot is	OL, I OO
	0,,	-	



DIMENSIONS

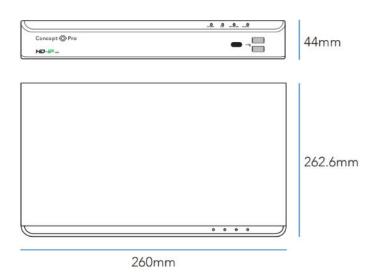

REAR PANEL



ORDER CODES

VUHDIPL-4-2/1000	Concept Pro Lite 4 Channel 8MP NVR 1TB
VUHDIPL-4-2/2000	Concept Pro Lite 4 Channel 8MP NVR 2TB
VUHDIPL-4-2/3000	Concept Pro Lite 4 Channel 8MP NVR 3TB
VUHDIPL-4-2/4000	Concept Pro Lite 4 Channel 8MP NVR 4TB
VUHDIPL-4-2/6000	Concept Pro Lite 4 Channel 8MP NVR 6TB
VUHDIPL-4-2/8000	Concept Pro Lite 4 Channel 8MP NVR 8TB
VUHDIPL-4-2/10000	Concept Pro Lite 4 Channel 8MP NVR 10TB

